

# .XSP-25150D1

15" IP66 Stainless Steel Panel PC with 12th Gen Intel® Core™ or Intel® Celeron® Processor

## Overview

The 15-inch XSP-25150D1 stainless steel panel PC, powered by 12th Gen Intel® Core™ i5-1235U or Celeron® J6412 processors, is specifically designed for the food processing and pharmaceutical industries. Its housing is constructed from SUS 304/316 stainless steel with a seamless design, making it easy to clean and highly durable. The narrow bezel provides a modern, sleek appearance. The XSP-25150D1 is compact and equipped with M12 I/O ports, meeting IP66 dust and waterproof standards, making it ideal for dusty, humid, or harsh environments.

## Features

- 12th Generation Intel® Core™ i5-1235U or Celeron® J6412 processor
- 15" stainless steel panel PC with capacitive or resistive touchscreen
- Seamless stainless steel SUS304/316 housing
- M12 I/O connectors
- -10 to 50°C wide operating temperature range
- Fanless and IP66 protection
- 9 to 36 VDC input



Windows  
11/10



Fanless



IP66




Touch  
Display



Wide  
Temp.

## I/O Interfaces

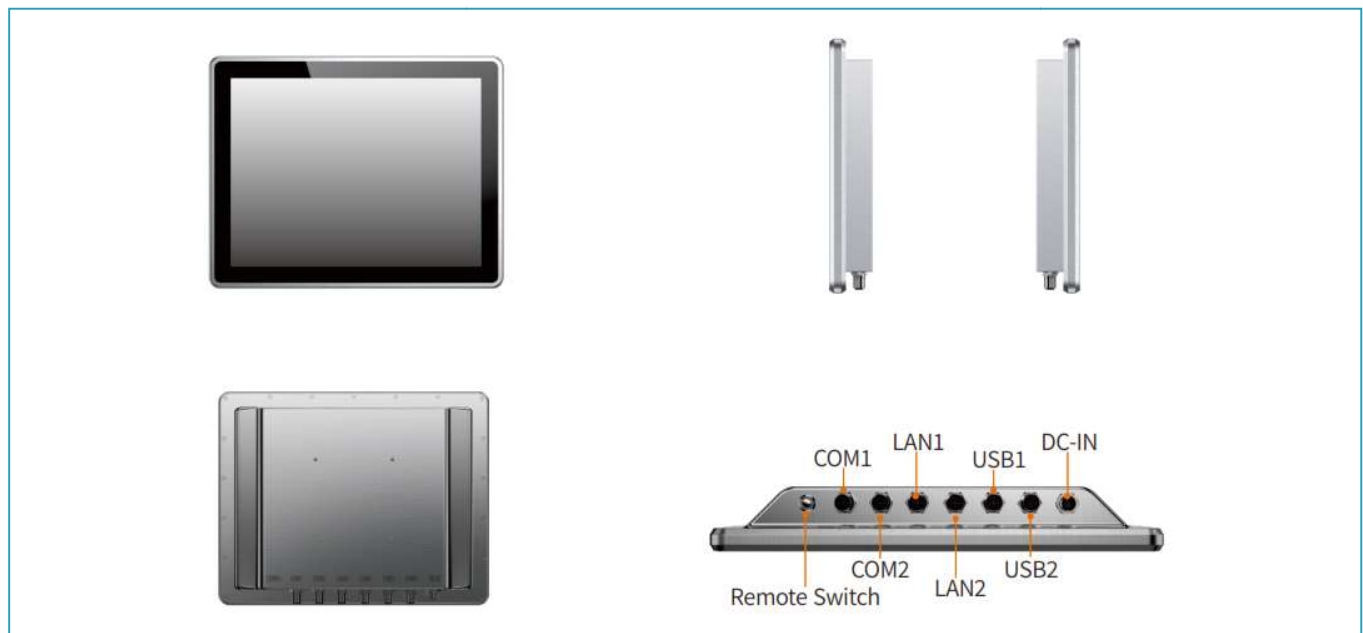

# .XSP-25150D1

15" IP66 Stainless Steel Panel PC with 12th Gen Intel® Core™ or Intel® Celeron® Processor

## Specifications

DISPLAY		
Size	15-inch	
Touch type	Projected capacitive multitouch 5-wire resistive touch	
Transmittance	87% (capacitive) 80% (resistive)	
Control Interface	USB	
Surface Hardness	≥7H for capacitive, ≥3H for resistive	
Resolution	1024 x 768	
Luminance	350 nits	
Contrast ratio	1000:1	
View angles	89 (left), 89 (right), 89 (up), 89 (down)	
LED Lifetime	50 000 hrs	
Color	16.7M	
SYSTEM		
CPU	Intel® Celeron® J6412 (2.0 GHz) processor	Intel® Core™ i5-1235U (1.3 GHz) processor
Memory	1x SO-DIMM DDR4-3200MHz, up to 16GB	2x SO-DIMM DDR4-3200MHz, up to 64GB
Storage	1x 2.5" SATA HDD/SSD (optional) 1x full length Mini PCIe for mSATA SSD	1x 2.5" SATA HDD/SSD (optional) 1x M.2 for 2280 NVME SSD
Operating System	Windows 10 Windows 11	
I/O PORTS		
USB	4x USB 2.0	
Serial	2x COM : 2x RS-232 Or 1x RS-232 et 1x RS-485	
Ethernet	2x GbE LAN	
RF COMMUNICATION		
Wi-Fi	Wi-Fi 802.11 a/b/g/n/ac (Optional)	
Bluetooth	Bluetooth 4.0 (Optional)	
POWER		
Button	Yes	
DC Input	9 to 36VDC	
Power Consumption	18W	23W
Power Mode	ATX	
MECHANICAL		
Dimensions (W x D x H mm)	362 x 286 x 52 mm (14.26 x 11.26 x 2.04 inches)	
Weight (kg)	5.7 kg (12.57 lbs)	
Mounting	VESA 100	
Material	Stainless steel SUS 304 or 316 (optional)	
ENVIRONMENT		
Operating Temperature	-10°C to 50°C (14°F to 122°F) -20°C to 60°C (-4°F to 140°F)(with W.T. SSD/DRAM)	
Storage Temperature	-40°C to 80°C (-40°F to 176°F)	
Relative Humidity	5% to 90%, non-condensing	
IP Rating	IP66 compliant	


# .XSP-25150D1

15" IP66 Stainless Steel Panel PC with 12th Gen Intel® Core™ or Intel® Celeron® Processor

## PACKING LIST

Packing	1x XSP-25150D1 2x M12 to RJ45 Ethernet cable 2x M12 to USB cable 2 x M12 to DB9 cable 1x AC-DC power adapter 1x AC power cord
---------	----------------------------------------------------------------------------------------------------------------------------------------------

## Dimensions

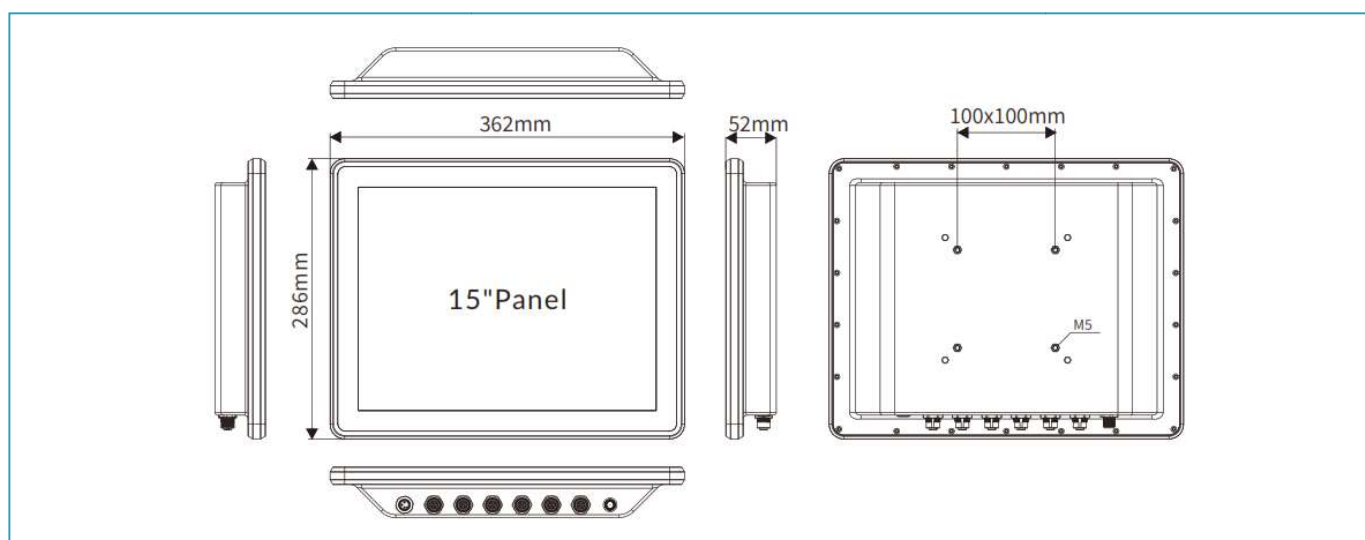

## Ordering Information

Ref.	Description
XSP-25150D1J6412R	15" LCD, Intel Celeron J6412, Resistive, BARE model, DC 9~36V input, M12 3P
XSP-25150D1J6412C	15" LCD, Intel Celeron J6412, P-Cap, BARE model, DC 9~36V input, M12 3P
XSP-25150D1I512UR	15" LCD, Intel Core-i5-1235U, Resistive, BARE model, DC 9~36V input, M12 3P
XSP-25150D1I512UC	15" LCD, Intel Core-i5-1235U, P-Cap, BARE model, DC 9~36V input, M12 3P