.XOM-25156D1



15.6" Open Frame Monitor

Overview

The Intronix Systems Open Frame Monitor series features a modular design that allows for versatile installation using both back and VESA methods. With its borderless design and lightweight construction, this series can seamlessly integrate into any embedded application. Additionally, the open architecture supports a size range of 8 to 15.6 inches and offers multiple touch screen options, including resistive and capacitive technologies.

Features

- HDMI/DP, VGA, DVI three signal interfaces
- Multiple installation methods including rear installation and VESA installation
- Solution for resistive/capacitive touch screen
- DC-IN 12 to 24V









I/O Interfaces



.XOM-25156D1



15.6" Open Frame Monitor

Specifications


DISPLAY	
Size	15.6-inch
	Projected capacitive multi touch
Touch type	5-wire resistive touch (optional)
Transmittance	87% (Capacitive)
	80% (Resistive)
Control interface	USB
	≥7H
Surface hardness	≥3H
Resolution	1920 x 1080
Luminance	450 nits
Contrast ratio	1000: 1
View angles	85 (left), 85 (right), 85 (up), 85 (down)
LED Lifetime	50 000 hrs
Color	16.7M
I/O PORTS	10.711
USB	1x USB 2.0
036	1x HDMI
Display	1x VGA
	1x DVI
POWER	1X DV1
Button	Yes
DC Input	12 to 24 VDC
Power Connector	2-pin Phoenix terminal
Power Consumption	10W
	AC-DC, 12V, 5A, 60W
Power Adaptor ENVIRONMENT	AC-DC, 12V, 5A, 6UVV
	100C to E00C (14 to 1220E)
Operating temperature	-10°C to 50°C (14 to 122°F)
Storage temperature	-20°C to 60°C (-4 to 140°F)
Relative humidity	10% to 95% @ 40°C (104°F), non-condensing
Vibration	5 to 500Hz, 0.026 G ² /Hz, 2.16 Grms, X, Y, Z, 1 hour per axis
IP Rating	IP65 compliant (For Front Panel)
MECHANICAL	200 2 240 2 25 (45 2 0 5 4 4 in about
Dimensions (W x D x H mm)	388.2 x 240.3 x 35 mm (15.2 x 9.5 x 1.4 inches)
	425 x 275 x 36.5 mm (16.7 x 10.8 x 1.43 inches)(Including touch solution)
Weight (kg)	3.0 kg (6.6 lbs)
Management	3.4 kg (7.5 lbs)(Including touch solution)
Mounting	Wall mount bracket VESA 75
Material	All motal shassis
CERTIFICATION	All-metal chassis
CERTIFICATION	CE
EMC	CE FCC
DACKING LIST	ruc
PACKING LIST	1v VOM 25154D1
Packing	1x XOM-25156D1
	1x Warranty card


.XOM-25156D1



15.6" Open Frame Monitor

Dimensions

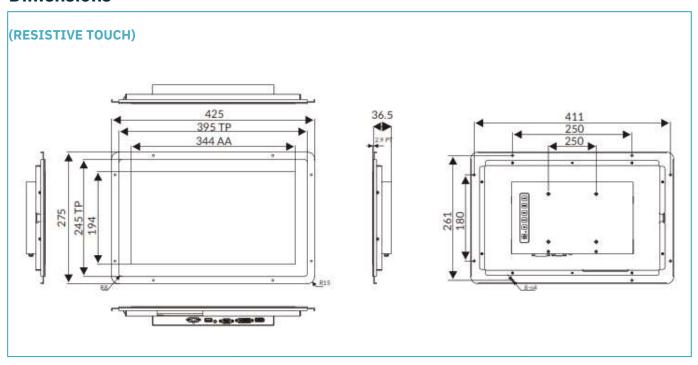

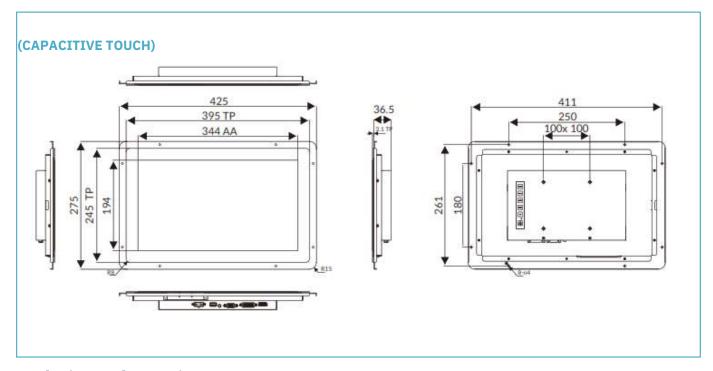

Ordering Information

Ref.	Description
XOM-25156D1R	15.6" LCD Industrial Monitor with resistive touch, DC12-24V input, Phoenix 2P TB
XOM-25156D1C	15.6" LCD Industrial Monitor with P-CAP touch, DC12-24V input, Phoenix 2P TB