.XIM-23150D1



15" Industrial Touch Monitor with Capacitive or Resistive Touch Screen

Overview

The XIM-23150D1 is an 15-inch 4:3 industrial monitor designed for industrial applications. It features a projected capacitive multitouch or 5-wire resistive touchscreen, housed within a highly durable metal casing, providing front panel IP65-rated protection from water and dust ingress. It supports three signal interfaces via VGA, DP/HDMI, and DVI. Furthermore, the ultra-thin design of the XIM-23150D1 enables both VESA 100 mount and panel mount installation, simplifying the installation process in different applications.

Features

- 15" LED-backlit LCD with capacitive or resistive touch screen
- 1x VGA, 1x DVI, 1x DP/HDMI, 1x USB2.0
- DC-IN 12 to 24V
- Supports VESA 100 mount and panel mount
- IP65 compliant front panel









I/O Interfaces



.XIM-23150D1



15" Industrial Touch Monitor with Capacitive or Resistive Touch Screen

Specifications


| DISPLAY | |
|---------------------------|---|
| Size | 15-inch |
| | Projected capacitive multitouch |
| Touch type | 5-wire resistive touch (optional) |
| Transmittance | 87% (Capacitive) |
| | 80% (Resistive) |
| Control interface | USB |
| | ≥7H |
| Surface hardness | ≥3H |
| Resolution | 1024 x 768 |
| Luminance | 350 nits |
| Contrast ratio | 1000: 1 |
| View angles | 89 (left), 89 (right), 89 (up), 89 (down) |
| LED Lifetime | 50 000 hrs |
| Color | 16.7M |
| I/O PORTS | ±0.711 |
| USB | 1x USB 2.0 |
| Display | 1x DP / HDMI (select one) |
| | 1x VGA |
| | 1x VGA 1x DVI |
| POWER | 1X DVI |
| Button | Yes |
| DC Input | 12 to 24 VDC |
| Power Connector | |
| | Button |
| Power Consumption | 10W |
| Power Adaptor | AC-DC, 12V, 5A, 60W |
| ENVIRONMENT | 4.000 +- 5.000 (4.405 +- 4.0005) |
| Operating temperature | -10°C to 50°C (14°F to 122°F) |
| Storage temperature | -20°C to 60°C (-4°F to 140°F) |
| Relative humidity | 10% to 95% @ 40°C (104°F), non-condensing |
| Vibration | 5 to 500Hz, 0.026 G ² /Hz, 2.16 Grms, X, Y, Z, 1 hour per axis |
| IP Rating | IP65 compliant (For Front Panel) |
| MECHANICAL | |
| Dimensions (W x D x H mm) | 370 x 294 x 41.5 mm (14.6 x 11.6 x 2.6 inches) |
| Weight (kg) | 3.45 kg (9.2 lbs) |
| Mounting | Panel mount |
| | Wall mount bracket VESA 100 |
| Material | Aluminum alloy panel |
| | All-metal chassis |
| CERTIFICATION | |
| EMC | CE |
| | FCC |
| PACKING LIST | |
| | 1x XIM-23150D1 |
| Packing | 8x Panel mounting buckles |
| | 1x Warranty card |

.XIM-23150D1



15" Industrial Touch Monitor with Capacitive or Resistive Touch Screen

Dimensions

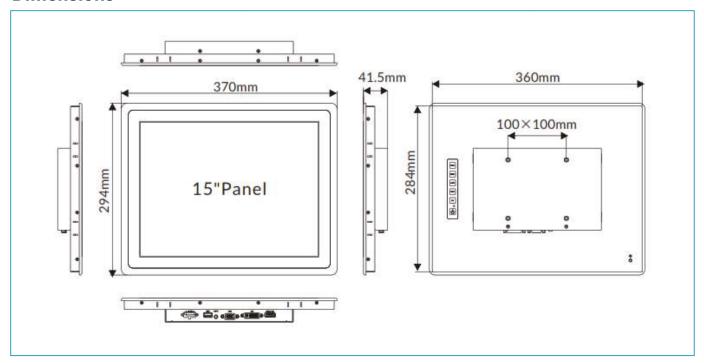

Ordering Information

| Ref. | Description |
|--------------|---|
| XIM-23150D1R | 15"LCD Industrial Monitor with resistive touch, DC12-24V input, Phoenix 2P TB |
| XIM-23150D1C | 15"LCD Industrial Monitor with P-CAP touch, DC12-24V input, Phoenix 2P TB |